



G57-01/10

UNDER CANNOPY LIGHT



## FEATURES

### Supplementary Light G57-01/10



#### Larger Emission Angle

Wider coverage & enhanced penetration & energy-saving




#### Multiple Mounting Options

Either with bracket or hanging according to the planting environment




#### Daisy-chaining Option

Create a unified and flexible lighting system

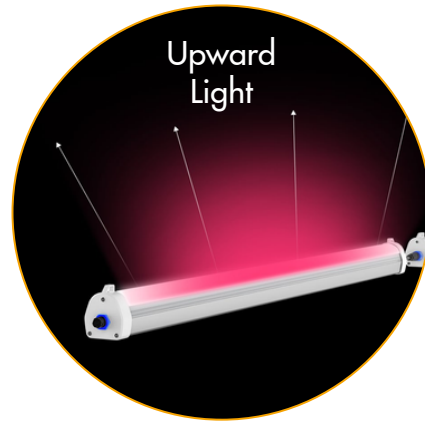

#### Supported Controllers

Support 0-10V Dimming

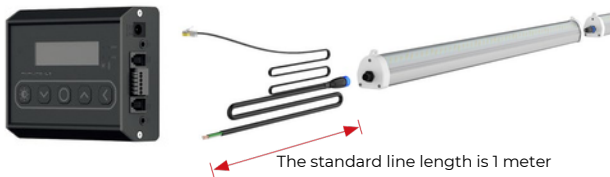


#### Hanging Installation




#### Bracket Mount

Height adjustment range:  
6.5"~11.5"

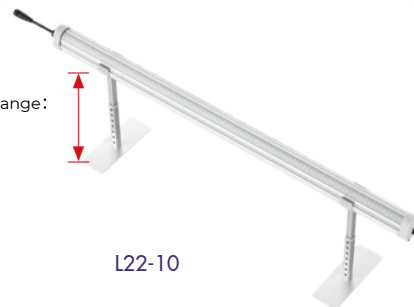

L22-10


## DIMENSIONS

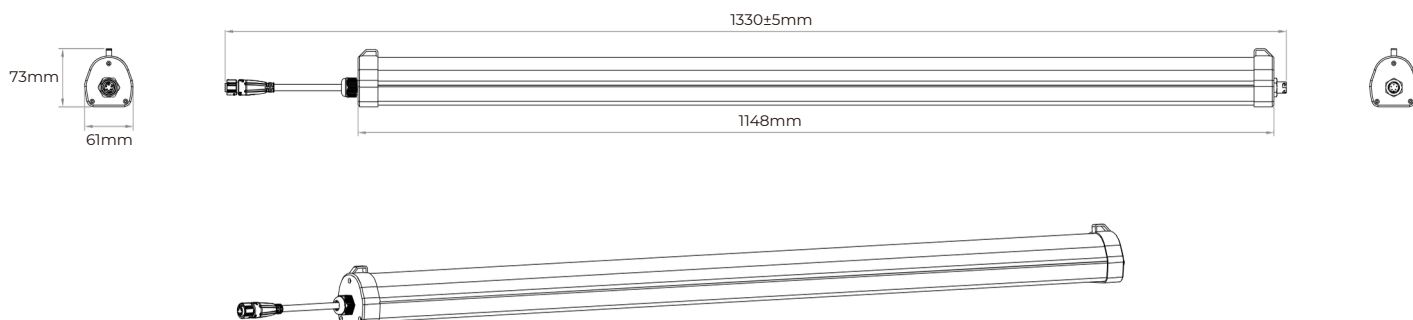

### SPECIFICATIONS

| Model                  | G57-01                                     | G57-10         |
|------------------------|--------------------------------------------|----------------|
| Input Wattage          | 120W                                       |                |
| PPF (Light output ±5%) | 360μmol/s                                  |                |
| PAR Efficacy           | 3.0μmol/J                                  |                |
| Input Voltage          | 120-277VAC 50/60Hz                         | 347VAC 50/60Hz |
| Dimming Control        | 0-10V                                      |                |
| Network Port Type      | RJ12                                       |                |
| Power Factor           | >0.95                                      |                |
| Beam Angle             | 1200                                       |                |
| Thermal Management     | Passive Cooling                            |                |
| Mounting Height        | ≥ 0.49" (152mm) Above Plant Canopy         |                |
| Warranty Lifetime      | 5 year   Q90>36,000hrs                     |                |
| Certifications         | DLC / ETL(UL8800 Standard) / CE / RoHS     |                |
| Waterproof Rating      | IP65 Wet location                          |                |
| Working Temperature    | 14°F ~ 104 °F (-10 °C ~ +40 °C)            |                |
| Dimensions   Weight    | LED Lamp: 1330 L x 61 W x 73 H mm   15.1lb |                |
| Installation method    | Hanging mounted, bracket mounted           |                |

### Spectrum GP7

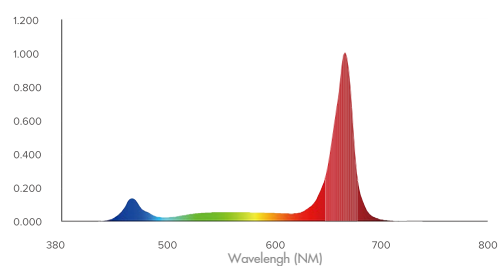


| Input      |      | Linkable |
|------------|------|----------|
| 120-277VAC | 120V | 7PCS     |
|            | 230V | 13PCS    |
|            | 240V | 14PCS    |
|            | 277V | 16PCS    |
| 347VAC     | 347V | 19PCS    |



## PACKAGING INFORMATION

| Model     | Carton Size    | N.W per carton  | G.W per carton  | Quantity / Carton |
|-----------|----------------|-----------------|-----------------|-------------------|
| G57-01/10 | 1360*255*198mm | 9.75Kg / 21.5lb | 13.2Kg / 29.1lb | 6 PCS             |

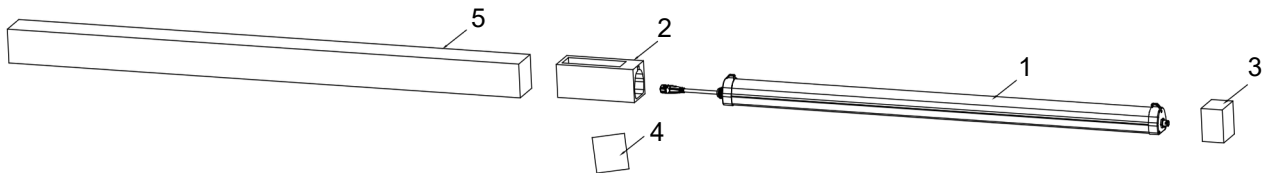

|   |                    |      |
|---|--------------------|------|
| 1 | The LED Grow Light | 1PCS |
| 2 | EPE(A)             | 1PCS |
| 3 | EPE(B)             | 1PCS |
| 4 | The manual         | 1PCS |
| 5 | The Color box      | 1PCS |

